



## 产品特性/Product Features

IP6K9K

250A 85°C长时间载流能力

12-750VDC

1000M $\Omega$  (1000VDC) , IEC 60664-

1

PWM

**性能参数 / Performance parameters**

		1000MΩ(1000VDC)
		3000VAC 1min
		3000VAC 1min
( )		≤30ms
( )		≤10ms
		196m/s <sup>2</sup>
		490m/s <sup>2</sup>
		10Hz~500Hz 49m/s <sup>2</sup>
		5%~85%RH
		-40°C~85°C
		/
		400g

**线圈参数 / Coil parameters**

VDC	VDC	VDC	W
9~24V	9	≥4.5	26W 3W
-40°C~85°C)			

**订货标记示例**


**HFEVC - H Y 250 / 750 - 12 - C N SM -**

1	2	3	4	5	6	7	8	9	10
1	HFEVC:								
2	T:		H:						
3	F:		Y:						
4	250: 250A								
5	DC Blank: 450V		750: 750V						
6	12: DC12V		24: DC24V	PWM: 9V~24V					
7	C:		L:						
8	Blank:		N:						
9	Blank:		SM:						
10									

1)

**外形图、安装孔尺寸 / Outline drawing, mounting hole size**

/Unit mm

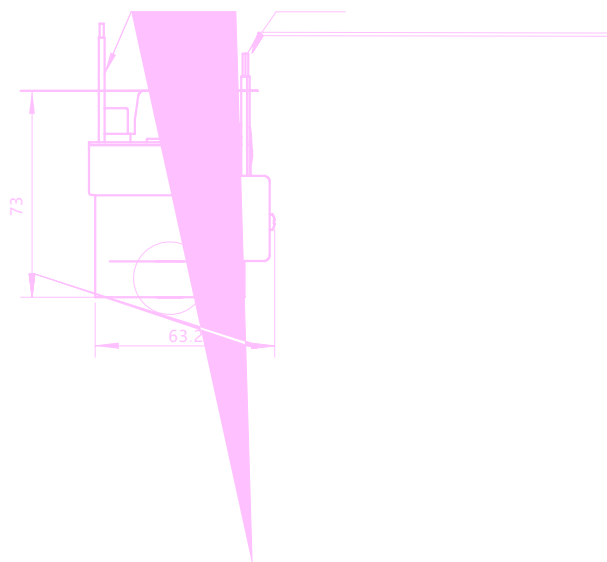

性能曲线图 Performance graph

1

性能曲线图		性能曲线图		性能曲线图	
M5螺钉 (内螺纹)	3N·m				

M8

2

100m

3

3mm